


# ACTA SIMULATIO

International Scientific Journal about Simulation

electronic journal  
ISSN 1339-9640



2020 Volume 6 Issue 1

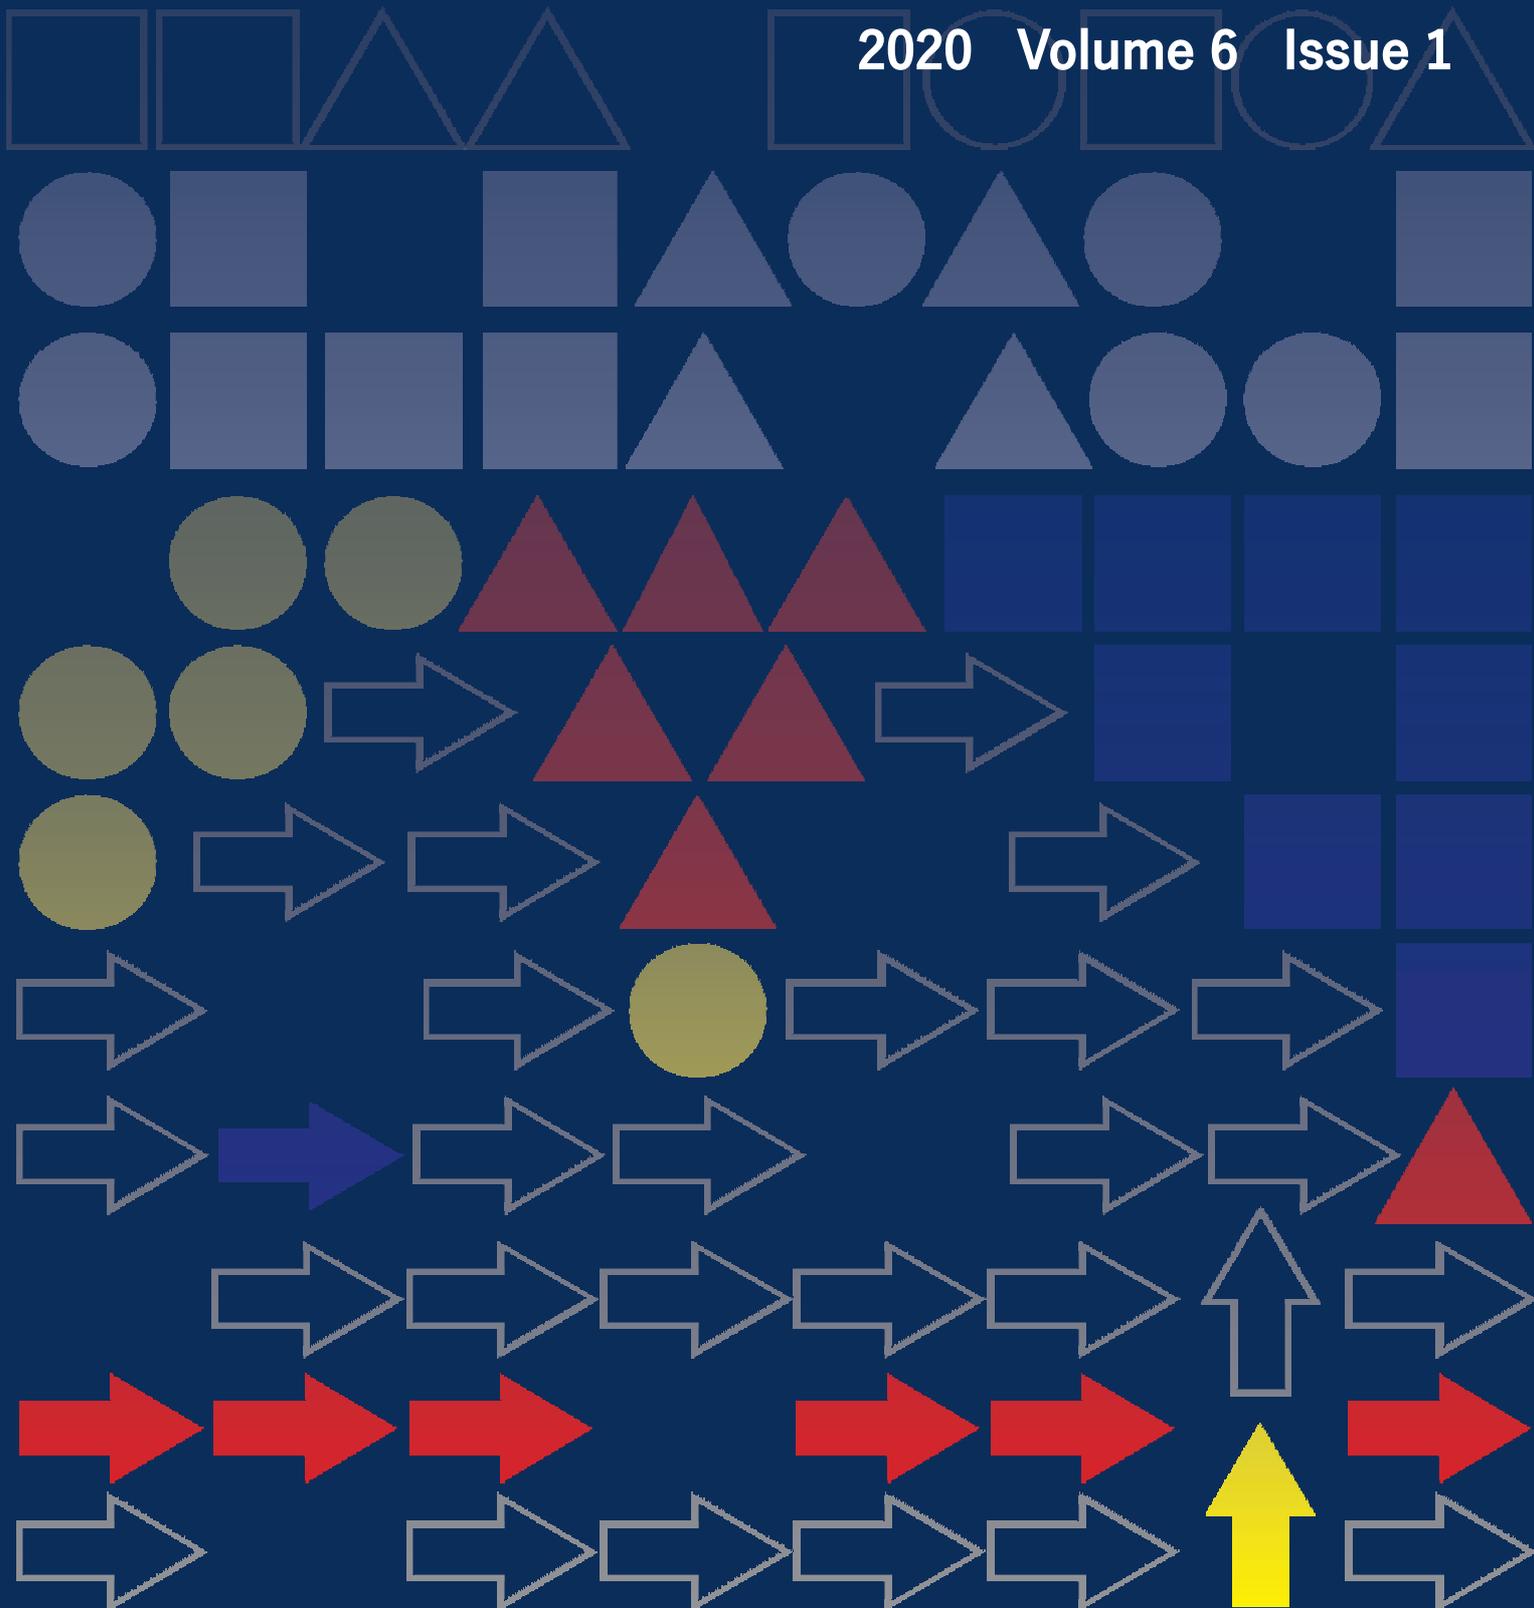

---

**CONTENTS**

**(MARCH 2020)**

**(pages 1-6)**

**VERIFICATION OF PROPOSALS FOR INCREASING THE EFFICIENCY  
OF THE PRODUCTION PROCESS USING MANAGEMENT METHODS  
USING SIMULATION SYSTEM TECNOMATIX**

Marek Kliment, Peter Trebuňa, Ladislav Rosocha, Štefan Král, Richard Duda

# **VERIFICATION OF PROPOSALS FOR INCREASING THE EFFICIENCY OF THE PRODUCTION PROCESS USING MANAGEMENT METHODS USING SIMULATION SYSTEM TECNOMATIX**

## **Marek Kliment**

Technical University of Kosice, Faculty of Mechanical Engineering, Institute of Management, Industrial and Digital Engineering, Park Komenskeho 9, 042 00 Kosice, Slovakia, EU, marek.kliment@tuke.sk (corresponding author)

## **Peter Trebuňa**

Technical University of Kosice, Faculty of Mechanical Engineering, Institute of Management, Industrial and Digital Engineering, Park Komenskeho 9, 042 00 Kosice, Slovakia, EU, peter.trebuna@tuke.sk

## **Ladislav Rosocha**

Technical University of Kosice, Faculty of Mechanical Engineering, Institute of Management, Industrial and Digital Engineering, Park Komenskeho 9, 042 00 Kosice, Slovakia, EU, ladislav.rosocha@tuke.sk

## **Štefan Král**

Slovak legal metrology n. o., Hviezdoslavova 1124/31 974 01 Banská Bystrica, Slovakia, EU, kral@slm.sk

## **Richard Duda**

Technical University of Kosice, Faculty of Mechanical Engineering, Institute of Management, Industrial and Digital Engineering, Park Komenskeho 9, 042 00 Kosice, Slovakia, EU, richard.duda@tuke.sk

**Keywords:** efficiency, simulation, plant simulation, Hoshin, manufacturing process

**Abstract:** The contribution is focused on the production line, which covers assembly in assemblies in the automotive industry. This process consists of several assembly stations. The paper contains a brief description of production positions. The production process was analysed, and a snapshot of work activities was created. We created a simulation using the Tecnomatix Plant Simulation software tool. To increase efficiency, we also use the Hoshin method, which is commonly used in industrial enterprises. Hoshin Kanri is used as a system management tool to develop an annual tactic to implement in all departments and functions within the company. It is for organisations looking for ways to create an effective plan for the future. It is a composition of tools and principles that we can say are helpful in a set of change management and planning systems.

## **1 Introduction**

The contribution is focused on production in the automotive industry. It is the production and assembly of components into the car cranks. It describes the assembly process for a functional assembly used daily to open and close a car. Every business aims to make everything work as efficiently as possible and to achieve the maximum for the minimum amount of money spent. In improving each process, it is essential to use the tools available to achieve the highest degree of efficiency for both the business and the end-user, who often do not even realise what is behind the everyday things of daily consumption [3-6]. Such means are also simulation software and various management methods. It is essential to address the life cycle of a product and the means that it consumes and affects its final price. These are products and components of products, human as well as material resources entering the transformation process. When designing efficiency gains, we will look at several possible options for achieving this goal. These are modifications of existing machines, reassessment of the number of operators and distribution of

individual jobs. It was necessary to break down operations into smaller parts and use the MTM method to improve efficiency. Under this proposal, efforts have been made to align operations to improve overall production times [7-9].

## **2 Production process and its properties**

The production process analysed is the assembly of the handle holder. It is the part of the component located between the outer and inner handle on the car door (Figure 1). This part ensures the functionality and appearance of the car handle. Allows movement of the vehicle's outer and inner handles. The production line can produce 1,650 pieces of these components per shift. The time to build one handle is 110 seconds. One finished product leaves the production line every 13 seconds. One operator operates each workplace. There are ten operators on this production line, and their number may change as needed. Each component has its specification, e.g. dimensions, appearance, material and the like. This assembly process consists of assembly and testing operations. Assembly operations consist of eight positions where components are

**VERIFICATION OF PROPOSALS FOR INCREASING THE EFFICIENCY OF THE PRODUCTION PROCESS USING MANAGEMENT METHODS USING SIMULATION SYSTEM TECNOMATIX**

Marek Kliment; Peter Trebuňa; Ladislav Rosocha; Štefan Král; Richard Duda

joined. During assembly operations on individual positions, it is necessary to distinguish to which car door the holder belongs [1,2].

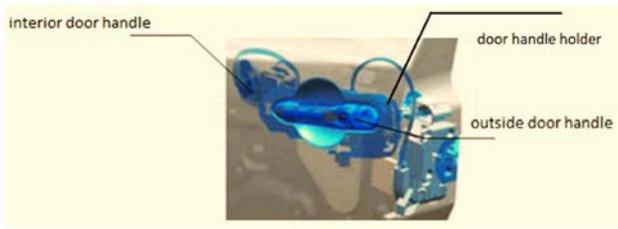
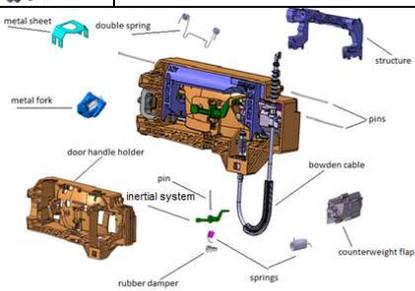


Figure 1 Car door handle holder

Table 1 Decomposition of a car door handle holder and its parts

component	description
	bolt in the metal fork
	metal fork
	detail sheet
	double spring
	door handle holder (bracket)
	counterweight flap
	spring
	pin
	Slider
	inertial system
	spring
	pin
	rubber damper
	structure
	bowden cable
	

**2.1 Decomposition of assembly unit and description of the production process**

Table 1 contains the decomposition of components that are part of the assembly unit. In other points, we can see a brief description of the assembly process, the whole product. The entire assembly process consists of the following operations:

1. Inserting the rubber damper into the counterweight flap,
2. Inserting the slider and springs into the counterweight flap,
3. Lubrication of the saddle and the insertion of the bowden cable liner,
4. Inserting double spring and fixing pins,
5. Insertion and lubrication of kinematic slider and pin insertion,
6. Inserting and push pins,
7. Mounting inertial system,
8. Pushing pins into the inertial system,
9. Product testing.

**2.2 Analysis and simulation of the manufacturing process of assembly**

We analysed the production process in its original state and simulated it using the software module Tecnomatix Plant Simulation (Figure. 2).

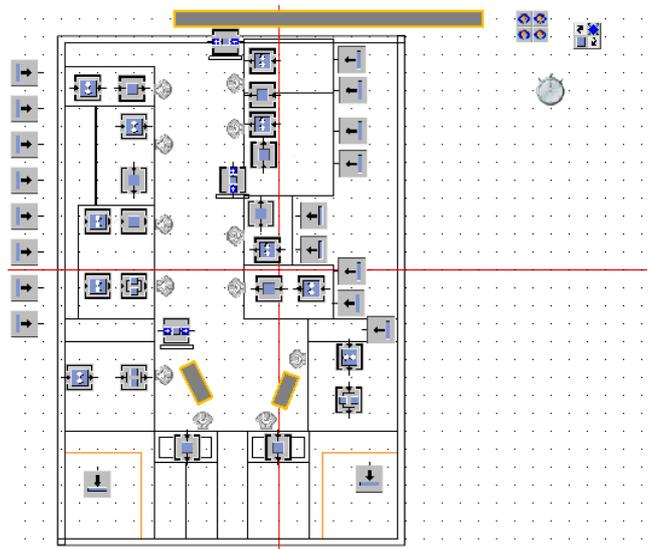


Figure 2 Simulation of the manufacturing process of car door handle holder

On the production layout, we can see 12 jobs in individual jobs. Ten employees operate the line. In the simulation, it is possible to see the sidewalk on which operators come to the line and two shorter sidewalks directly after these two operators move between working positions on the lines and occupy two positions in the production process [10-11].

**VERIFICATION OF PROPOSALS FOR INCREASING THE EFFICIENCY OF THE PRODUCTION PROCESS USING MANAGEMENT METHODS USING SIMULATION SYSTEM TECNOMATIX**

Marek Kliment; Peter Trebuňa; Ladislav Rosocha; Štefan Král; Richard Duda

**2.3 Suggestions for improving the production process**

Based on the production process analysis, mapping of the production process and subsequent simulation, we try to find the most effective variants that can help increase efficiency, fluency, and productivity [12-14].

**2.3.1 Machine modification**

With this variant of streamlining the production process, we adjust specific machine parameters, resp. We add the manufacturing operations in the manufacturing process that the machine will perform. Modification of the machine would be carried out by the company that manufactured the specific machine. The aim is to save assembly time as well as reduce possible errors. We can save time by combining the operations performed at the first and second production stations. With this proposal, we can save the work of one operator. An improvement suggests inserting a rubber damper into the counterweight flap automatically by the machine. At the second production position, the operator lubricates the counterweight flap, inserts a spring, slider into it, and then puts it into the machine. Rubber dampers will be automatically inserted into the machine while the counterweight flap is fixed in the machine. The detection of the presence of a rubber damper will be the same as now. The time and dimensions of the machine will be unchanged.

There is no risk of improper insertion of the rubber flap when loading the machine. The operator has been in this operation for more than 10 seconds. The machine can do it faster and without any errors.

Observing the manufacturing process and measuring the times, we found that the time needed to perform the operation at the first station is 10.6 seconds and the time at the second station is 15.3 seconds. By unification these two processes with machine modification, we can do two operations in 12.3 seconds. This will save 13.6 seconds. We have verified this proposal using a simulation.

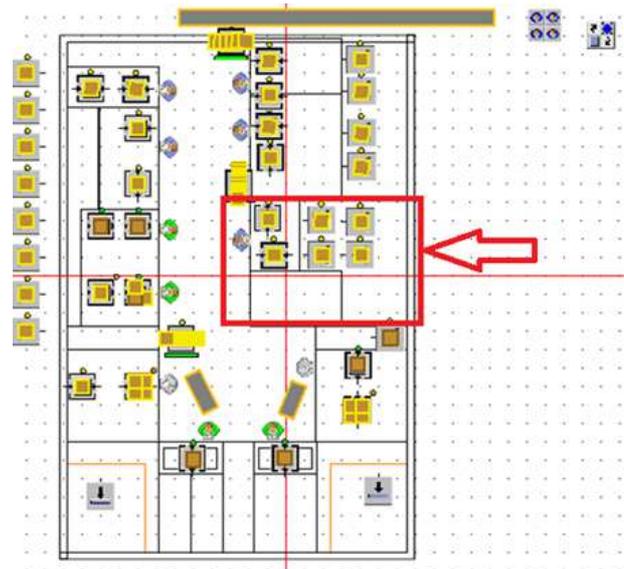


Figure 3 Proposal of machine modification in simulation

**2.3.2 Truncation and harmonise manufacturing operations using the Hoshin method**

Another variant of improving the efficiency of the assembly process is to shorten production operations. In this design, we used the Hoshin method and the MTM method [6]. On the production line, we performed the analysis by measuring the time of individual operations. We performed 20 measurements in one work shift (Table 2). We measured operations from the beginning of component assembly to the final product of the total product.

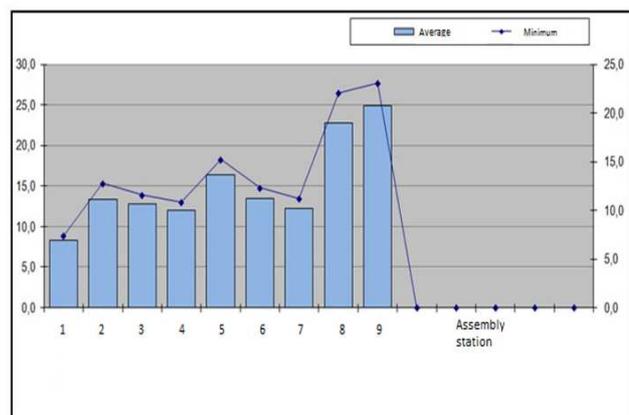


Figure 4 Production operations times

**VERIFICATION OF PROPOSALS FOR INCREASING THE EFFICIENCY OF THE PRODUCTION PROCESS USING MANAGEMENT METHODS USING SIMULATION SYSTEM TECNOMATIX**

Marek Kliment; Peter Trebuňa; Ladislav Rosocha; Štefan Král; Richard Duda

Table 2 Production operations times

Nr. of meas.	Pos. nr. 1	Pos. nr. 2	Pos. nr. 3	Pos. nr. 4	Pos. nr. 5	Pos. nr. 6	Pos. nr. 7	Pos. nr. 8	Pos. nr. 9
1.	7,4	14,0	13,8	12,5	16,2	13,0	12,1	22,5	26,9
2.	7,8	14,1	12,3	12,3	16,1	13,3	13,5	23,6	24,7
3.	8,6	13,3	11,6	12,5	16,3	14,3	13,5	23,7	24,3
4.	8,7	13,1	12,4	13,5	16,8	13,7	13,2	22,6	24,7
5.	8,8	13,1	12,1	11,8	16,2	13,9	12,5	24,4	25,1
6.	8,1	13,1	12,9	12,2	15,3	14,9	12,6	23,5	23,1
7.	8,7	13,2	14,1	12,0	15,7	12,8	12,1	22,1	24,4
8.	8,9	12,7	13,2	11,3	16,3	13,3	12,1	22,1	24,8
9.	8,8	13,7	14,1	10,8	15,7	13,5	11,4	22,4	24,7
10.	8,8	14,1	13,1	11,9	16,4	13,7	11,8	23,0	24,3
11.	8,1	13,5	12,1	11,3	15,2	13,6	13,1	22,1	24,9
12.	8,5	13,3	13,1	12,1	17,4	13,8	11,6	22,7	24,4
13.	7,8	13,1	13,3	12,1	16,3	13,9	12,4	22,5	26,8
14.	8,1	13,3	13,2	12,7	15,9	12,6	12,1	22,6	25,4
15.	8,9	13,1	12,5	12,5	16,9	12,6	11,4	22,1	25,1
16.	8,1	13,7	12,1	13,2	17,4	12,3	11,7	23,0	25,8
17.	8,0	13,6	12,5	12,6	17,7	12,9	11,4	22,7	24,6
18.	7,8	12,9	12,5	11,5	15,9	13,1	11,2	22,5	24,4
19.	8,8	13,8	12,6	11,2	17,3	13,5	12,5	23,1	25,3
20.	8,1	12,8	13,7	11,1	17,1	15,4	11,9	22,5	24,6
Overall	166,8	267,4	257,1	241,1	328,0	269,9	244,0	455,5	498,0
Average	8,3	13,4	12,9	12,1	16,4	13,5	12,2	22,8	24,9
Minimum	7,4	12,7	11,6	10,8	15,2	12,3	11,2	22,1	23,1
In %	13%	5%	11%	11%	8%	10%	9%	3%	8%

In the graph (Figure. 4) we can see how individual operations on the work posts move unevenly. In the next step, our goal is to break down individual operations into smaller operations. We choose the optimum time for operations to be approximately the same time. Small deviations are permissible.

In this improvement design, we will use the Hoshin method. We made more measurements. Our goal was to combine some operations. To increase efficiency, we will go to depth. We divide the operations into smaller operations using the MTM method. We have divided the operations carried out on the production line into small and detailed operations (Table 3). In this improvement proposal, we also counted on option no. 1 with a machine modification

Table 3 Separation of operations

Position	Operation type	Time in sec.
Pos. Nr. 1	Lubricating the counterweight flap	12,3 s
	Slider insertion	
	Inserting the spring	
	Inserting rubber damper	
Pos. Nr. 2	Lubrication of the handle holder	4,1 s
	Cable fixation	3,2 s
Pos. Nr. 3	Inserting the lever	5,6 s
	Spring lubrication	4,1 s
	Inserting the spring	4,8 s
	Inserting the pin into the lever	3,2 s
Pos. Nr. 4	Insert slider into internal structure and erase	7 s
	Insert internal structure and pin	9,4 s
Pos. Nr. 5	Inserting a pin	3,6 s
	Pressing pins	9,9 s
Pos. Nr. 6	Lubrication of inertial system	3,7 s
	Inserting a spring into an inertial system	3,9 s
	Inserting an inertial system into the handle holder	4,6 s
Pos. Nr. 7	Pushing pins into an inertial system	18,7 s
	Inserting sheet metal	4,1 s
Pos. Nr. 8	Insert the metal fork into the handle holder	4,0 s
	Testing the handle holder	13,6 s
Pos. Nr. 9	Car Door Handle Holder Pack	7,3 s

In this proposal, we tried to harmonise operations to no time jumps in individual production positions. Our goal was to improve production times and reduce the number of operators on the production line

In Table 4, we harmonised the manufacturing operations using the Hoshin and MTM method [7]. From nine production stations, we have reached seven production stations. This means we save the work of one operator on this proposal. The reconciliation of the manufacturing operations is also visible in the graph (Figure 5). It can be seen that the movement of times is much more even than in the first case.

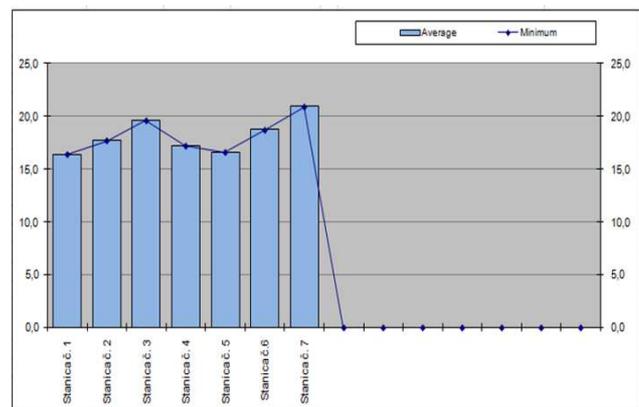


Figure 5 Graph of manufacturing operations after alignment

**VERIFICATION OF PROPOSALS FOR INCREASING THE EFFICIENCY OF THE PRODUCTION PROCESS USING MANAGEMENT METHODS USING SIMULATION SYSTEM TECNOMATIX**

Marek Kliment; Peter Trebuňa; Ladislav Rosocha; Štefan Král; Richard Duda

Table 4 Alignment of manufacturing operations

Position	Operation type	Time in sec.	
Pos.Nr. 1	Lubricating the counterweight flap	12,3 s	16,4 s
	Slider insertion		
	Inserting the spring		
	Inserting rubber damper		
	Lubrication of the handle holder	4,1 s	
Pos.Nr 2	Cable fixation	3,2 s	17,7 s
	Inserting the lever	5,6 s	
	Spring lubrication	4,1 s	
	Inserting the spring	4,8 s	
Pos.Nr. 3	Inserting the pin into the lever	3,2 s	19,6
	Insert slider into internal structure and erase	7 s	
Pos.Nr. 4	Insert internal structure and pin	9,4 s	17,2
	Inserting a pin	3,6 s	
	Pressing pins	9,9 s	
	Lubrication of inertial system	3,7 s	
Pos.Nr. 5	Inserting a spring into an inertial system	3,9 s	16,6
	Inserting an inertial system into the handle holder	4,6 s	
	Inserting sheet metal	4,1 s	
Pos. Nr. 6	Insert the metal fork into the handle holder	4,0 s	18,7
	Pushing pins into an inertial system	18,7 s	
Pos. Nr. 7	Testing the handle holder	13,6 s	20,9
	Car Door Handle Holder Pack	7,3 s	

We also transferred the design to the simulation for the harmonised operations. As we can see on the line, we have lost another operator in this design, and the fluidity of the production process has also improved (Figure 6, Figure 7).

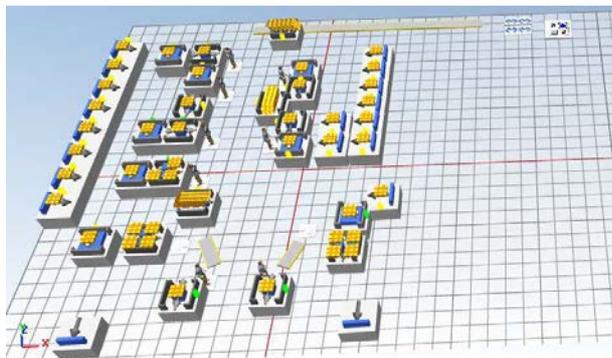


Figure 6 Simulation of harmonise operations in 3D

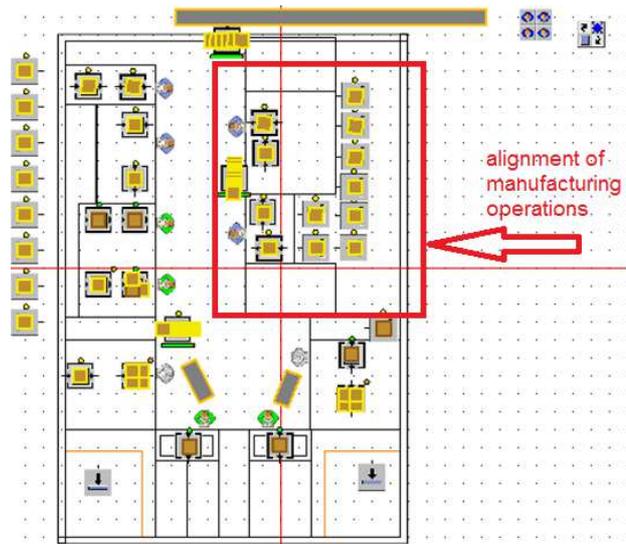


Figure 7 Simulation design of the reconciliation operation

### 3 Conclusions

As can be seen from the above suggestions and in normal business practice, it is often not enough to use only one means of evaluation and improvement to improve the production process. Still, it is necessary to combine and use several available methods. In this case, we used the simulation combined with the Hoshin and MTM method to achieve more efficient workplace reconciliation, time savings, and human resources savings. These methods complement each other and help managers in the company decide how and how to improve the manufacturing process.

### Acknowledgement

This article was created by the implementation of the grant project APVV-17-0258 "Digital engineering elements application in innovation and optimisation of production flows", APVV-19-0418 "Intelligent solutions to enhance business innovation capability in the process of transforming them into smart businesses", VEGA 1/0438/20 "Interaction of digital technologies to support software and hardware communication of the advanced production system platform" and KEGA 001TUKÉ-4/2020 "Modernising Industrial Engineering education to Develop Existing Training Program Skills in a Specialized Laboratory" and University Science Park TECHNICOM for Innovation Application Supported by Knowledge Technology, ITMS: 26220220182, supported by the Research and Development Operational Program funded by the ERDF.

### References

- [1] GREGOR, M., HODON, R., BIŇASOVÁ, V., DULINA, Ľ., GAŠO, M.: Design of Simulation Emulation Logistics System, *MM Science Journal*, Vol. 2018, No. October, pp. 2498-2502, 2018.

**VERIFICATION OF PROPOSALS FOR INCREASING THE EFFICIENCY OF THE PRODUCTION PROCESS USING MANAGEMENT METHODS USING SIMULATION SYSTEM TECNOMATIX**

Marek Kliment; Peter Trebuňa; Ladislav Rosocha; Štefan Král; Richard Duda

- [2] STRAKA M., KHOURI S., ROSOVA A., CAGANOVA D., CULKOVA K.: Utilisation of computer simulation for waste separation design as a logistics system, *International Journal of Simulation Modelling*, Vol. 17, No. 4, pp. 583-596, 2018.
- [3] LERHER, T., EDL, M., ROSI, B.: Energy efficiency model for the mini-load automated storage and retrieval systems, *The International Journal of Advanced Manufacturing Technology*, Vol. 70, pp. 97-115, 2014.
- [4] STRAKA, M., LENORT, R., KHOURI, S., FELIKS, J.: Design of large-scale logistics systems using computer simulation hierarchic structure, *International Journal of Simulation Modelling*, Vol. 17, No. 1, pp. 105-118, 2018.
- [5] KŁOS, S.: Implementation of the AHP method in ERP-based decision support systems for a new product development, *Communications in Computer and Information Science*, 2015.
- [6] WICHER, P., STAŠ, D., KARKULA, M., LENORT, R., BESTA, P.: A computer simulation-based analysis of supply chains resilience in industrial environment, *Metalurgija*, Vol. 54, No. 4, pp. 703-706, 2015.
- [7] ROSOVA, A., MALINDZAKOVA, M.: *Material flow - starting point for recovery of inputs in the production company*, International Multidisciplinary Scientific GeoConference Surveying Geology and Mining Ecology Management, SGEM, 14<sup>th</sup> International Multidisciplinary Scientific Geoconference and EXPO, SGEM Albena; Bulgaria, 2014.
- [8] KOBLASA, F., ŠÍROVÁ, E., KRÁLIKOVÁ, R.: The Use of Process Thinking in The Industrial Practice – Preliminary Survey, *The Journal Tehnički Vjesnik, Technical Gazette*, Vol. 26, No. 3, pp. 786-792, 2019. doi:10.17559/TV-20150617135306
- [9] LACIAK, M., SOFRANKO, M.: *Designing of the technological line in the SCADA system PROMOTIC*, Proceedings of the 2013, 14<sup>th</sup> International Carpathian Control Conference, Rytro, Poland, 2013.
- [10] BUČKOVÁ, M., KRAJČOVIČ, M., EDL, M.: Computer Simulation and Optimization of Transport Distances of Order Picking Processes, *Procedia Engineering*, Vol. 192, pp. 69-74, 2017. doi:10.1016/j.proeng.2017.06.012
- [11] FUSKO, M., RAKYTA, M., KRAJCOVIC, M., DULINA, L., GASO, M., GRZNAR, P.: Basics of Designing Maintenance Processes in Industry 4.0., *MM Science Journal*, Vol. 2018, No. March, pp. 2252-2259, 2018.
- [12] PLINTA, D., KRAJČOVIČ, M.: Production System Designing with the Use of Digital Factory and Augmented Reality Technologies, *Advances in Intelligent Systems and Computing*, Vol. 350, 2016.
- [13] DULINA, L., EDL, M., FUSKO, M., RAKYTA, M., SULIROVA, I.: Digitization in the Technical Service Management System, *MM Science Journal*, Vol. 2018, No. 1, pp. 2260-2266, 2018.
- [14] KRAJČOVIČ, M., PLINTA, D.: Comprehensive Approach to the Inventory Control System Improvement, *Management and Production Engineering Review*, Vol. 3, No. 3, pp. 34-44, 2012.



## JOURNAL STATEMENT

---

Journal name:	<b>Acta Simulatio</b>
Abbreviated key title:	Acta Simul
Journal title initials:	AS
Journal doi:	10.22306/asim
ISSN:	1339-9640
Start year:	2015
The first publishing:	March 2015
Issue publishing:	Quarterly
Publishing form:	On-line electronic publishing
Availability of articles:	Open Access Journal
Journal license:	CC BY-NC
Publication ethics:	COPE, ELSEVIER Publishing Ethics
Plagiarism check:	Worldwide originality control system
Peer review process:	Single-blind review at least two reviewers
Language:	English
Journal e-mail:	<b>info@actasimulatio.eu</b>

The journal focuses mainly on the original and new, interesting, high-quality, theoretical, practical and application-oriented contributions to the field of science and research as well as to pedagogy and education in the area of simulation.

Publisher:	<b>4S go, s.r.o.</b>
Address:	Semsa 24, 044 21 Semsa, Slovak Republic, EU
Phone:	+421 948 366 110
Publisher e-mail:	<b>info@4sgo.eu</b>

**Responsibility for the content of a manuscript rests upon the authors  
and not upon the editors or the publisher.**